



 **LEGIDATECH**

LOGO Series

Two Sides LED LOGO Display

01

LOGO LED Display

- ◆ Display Size : Diameter 60CM
- ◆ Pixel Pitch : 4.6mm
- ◆ LED Lamp : SMD
- ◆ Cabinet Material : Iron



02

Smart Management

Easily upload content via WIFI/4G, and manage hundreds of displays with one device from anywhere.



03

Product Details



Signal Connector




Cooling Hole

04

Protection level is up to IP65

Which makes L1 series easily used for indoor, outdoor and other situations.

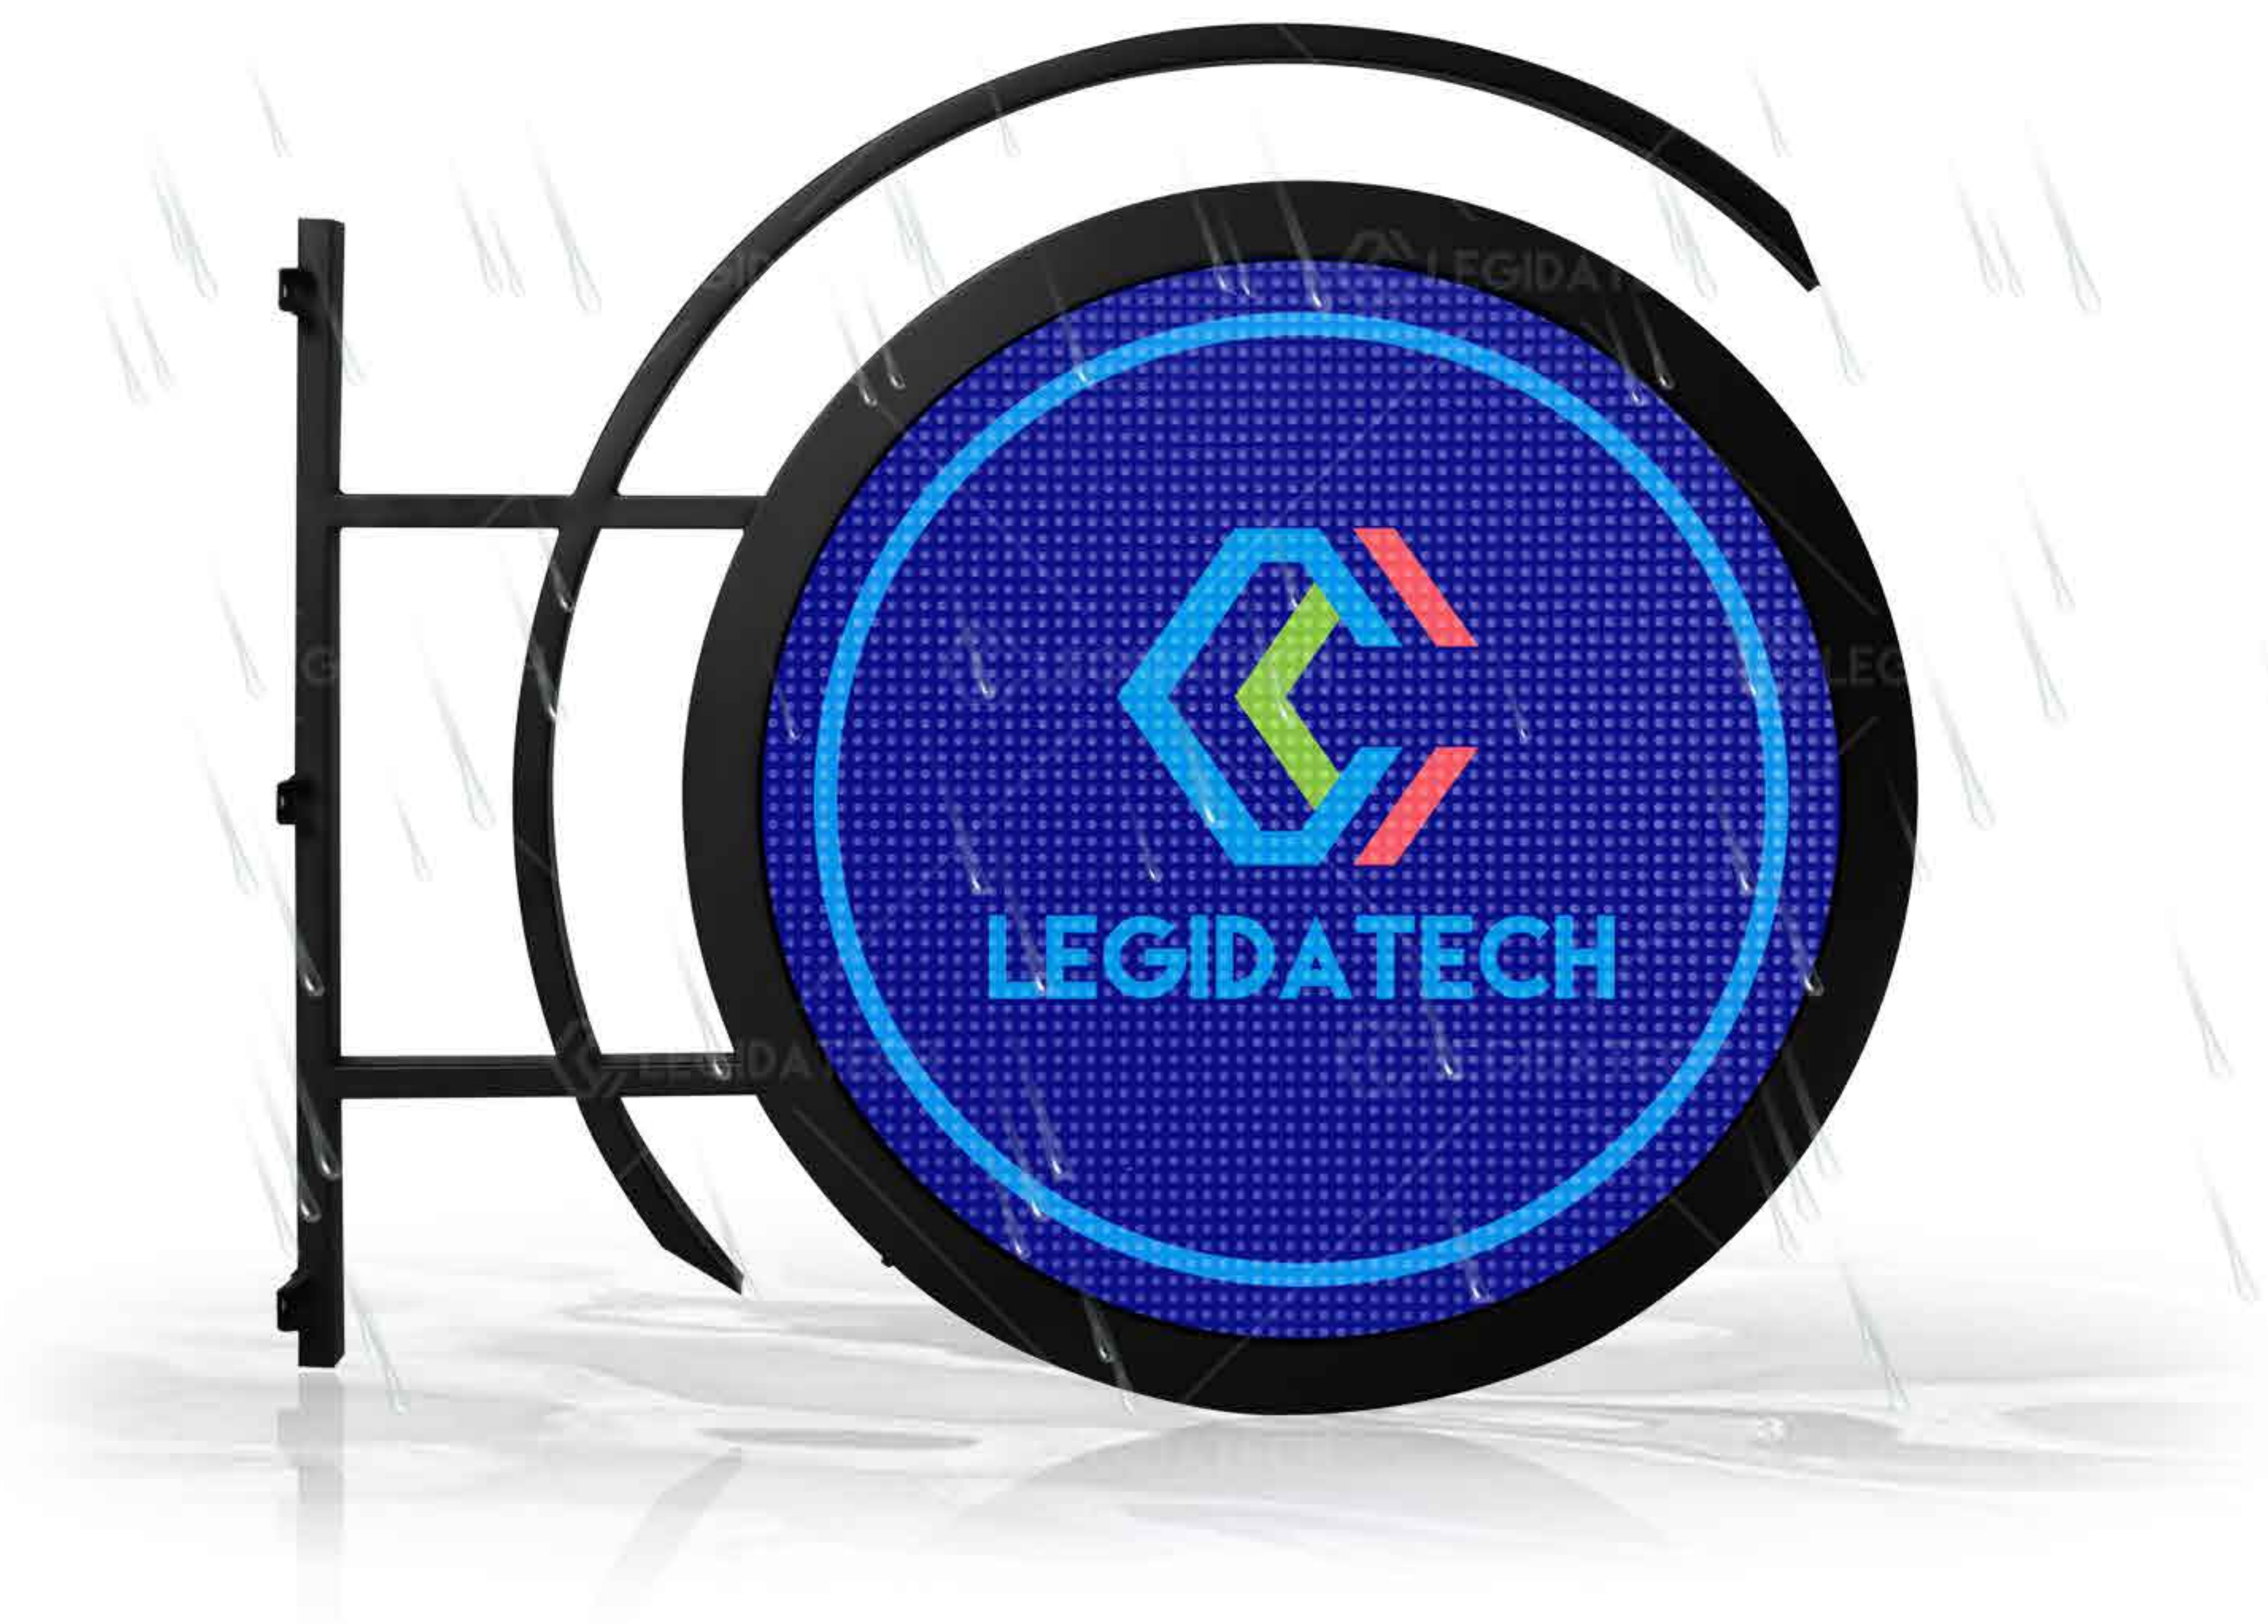

05

Installation and Maintenance

Easy to installation and maintenance



06

Product Size



LOGO Series

Value	P4.6
Pixel Composition	1R1G1BLED(SMD1921)
Pixel Pitch	4.6mm
Module Size	300mm x 300mm
Module Resolution	64 x 64
Display Density	128 x 128dot/side
Maximum White Balance Brightness	≥4500cd/m ²
Gray Level	red, green, and blue≥256 levels, up to 65536 levels
Out of Control Points	≤1/10000
Optimal Viewing Distance	≥4.68M
Viewing Angle	Level≥120° Vertical≥120°
Device Driver	1/8 scan
Chang Frame Frequency	≥60Hz
Refresh Rate	≥1920Hz
Control Method	Asymchromous/Synchronous(wifi/4G Cloud sevice/computer etc)
Waterproof Grades and Materials	IP65
Lifetime	≥100,000 hours
Operation Voltage (AC)	100 ~ 240
Environmental Temperature and Humidity	Temperature: -20°C~+60°C, Humidity: 10%-95%
Smoothness	adjustment image between ≤ 0.5mm; module splicing gap ≤ 0.5mm
Power Consumption (max/aver)	400W/Pcs
Maintenance Method	Front-maintenance
Screen Weight	≤16Kg/pcs
Switching Power Supply	5V/60A

