

PRODUCT SPECIFICATION

Multimedia Player

HD-A5L

Version 1.1.0822



1. Product Overview

A5L is an LED display multimedia player that supports playing videos, pictures, GIF animations, texts, WPS documents, tables, clocks, timing, and other programs. It integrates functions such as asynchronous playback, synchronous playback, supporting multi-terminal control and release programs.

Standard configuration of Wi-Fi, support mobile phone APP - "LedArt" wireless control; support access to the "XiaoHui Cloud" platform, easy to achieve Internet remote cluster management; The capacity storage space makes asynchronous playback worry-free; it supports external connection of various environmental monitoring sensors to realize real-time viewing of environmental monitoring data.

A5L has high video playback performance, added terminal network security protection mechanism, simple software operation, and complete functions. It applied to LED displays in various commercial display, smart display and other fields.

2. Product Features

Input:

- 1. Support 1 Gigabit communication network port for debugging parameters, faster program sending speed;
- 2. Support 1 HDMI IN input interface, support automatic zooming of synchronous pictures, and support synchronous and asynchronous picture-in-picture functions;
- 3. Support 1 channel USB2.0 (custom OTG/USB mode), 1 channel USB3.0 communication interface, which can be used for inserting programs and expanding capacity;
- 4. Supports 2 channels sensor input interface, externally connected to various environmental monitoring sensors.



Output:

- 1. Standard 2 Gigabit output network ports, directly cascaded HD-R series receiving card control display;
- 2. The maximum control range is 1.3 million pixels, the maximum horizontal (discounted) support is 16,384 pixels, and the maximum vertical support is 8,192 pixels;
- 3. 1 channel TRS 3.5mm standard two-channel audio output.


Functions:

- 1. Standard 2.4GHz Wi-Fi, support mobile phone APP wireless control (support STA mode, in this mode, the device can connect to the nearby Wi-Fi network);
- 2. Support multi-channel video window playback (support up to 2-channel 4K or 6-channel 1080P or 10-channel 720P or 20-channel 360P);
- 3. Support synchronous and asynchronous switching playback;
- 4. Support 4G/5G (optional) access to XiaoHui Cloud platform to realize Internet remote cluster management.



3. Appearance Description

Front panel:

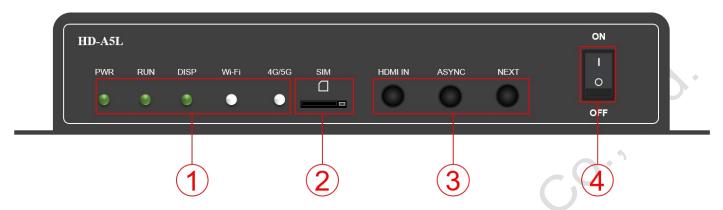


Serial number	Name	Description
		PWR : Power indicator light, the green light is always on, and the power input is
		normal
		RUN: System running light, the green light is flashing, the operating system is
		running normally; the green light is always on or off, the system is running
		abnormally
		DISP : Display indicator, green light flashes, the FPGA system is running normally;
1	Working light	the green light is always on or off and the system is running abnormally
	10	Wi-Fi : Wireless indicator light, in AP mode, the green light is blinking; in STA mode,
	SC/V	the green light is always on. The red light is blinking, the Wi-Fi is abnormal, and the
	0	light is off; the Wi-Fi bridge cannot connect to the server, and the yellow light is
9		always on
		4G/5G: Communication network indicator, green light is always on, the connection
		to the cloud server is successful; yellow light is always on, the cloud service cannot



		be connected; red light is always on, there is no signal or the SIM is in arrears or
		cannot dial; the red light is blinking, the SIM cannot be detected; No light, no
		module detected
2	SIM card slot	Micro SIM card slot, providing 4G/5G networking for remote control (optional
2		4G/5G module)
		HDMI IN: HDMI signal input, synchronous playback
3	Function button	ASYNC: Asynchronous mode switching
		NEXT: Switch program play
	Switch	Control the power of the player box, ON means power on and OFF means power
4		off

Rear panel:

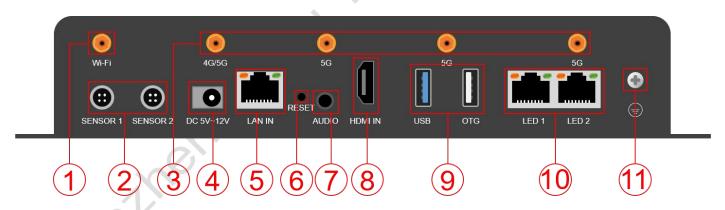

Serial number	Name	Description		
1 Wi-Fi antenna		Connect Wi-Fi antenna to enhance wireless signal		
2	Sensor	External temperature, humidity, brightness, wind speed, wind direction,		
		noise, PM2.5, PM10, CO₂ and other sensors		
3	4G/5G antenna	Connect 4G/5G antenna (4G with 1 antenna, 5G with 4 antennas, optional)		




4	Power supply	5V 3A ,12V 1.5A
5		Gigabit input network port, connect to computer to debug and release
3	Input network port	programs, can be used to access LAN or Internet
6	Reset	Reset pinhole
7	Audio output	TRS 3.5mm standard two-channel audio output port
8	HDMI	HDMI IN: HDMI1.4 synchronous signal input interface, support adaptive scaling
9	USB	USB: USB3.0 for updating programs, inserting programs or expanding capacity OTG: Used for debugging or upgrading firmware (default USB 2.0 function, factory configurable)
10	Output network port	Gigabit output network port, cascaded with HD-R series receiving card
11	Ground wire	Ground wire connection port
S	Glodild Wile	



4. Dimensions

Dimensions (mm):

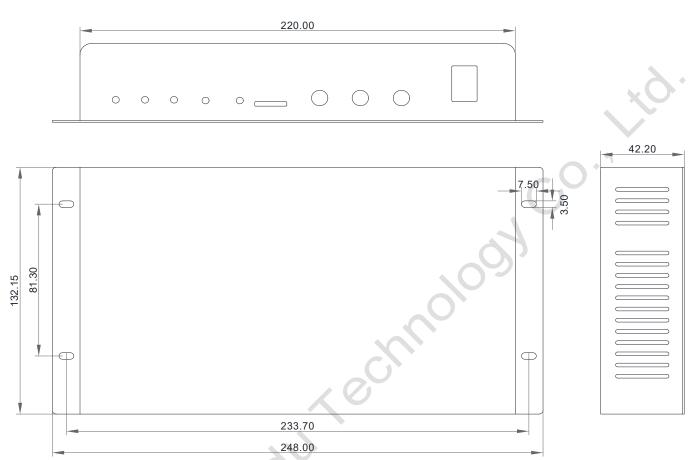

Tolerance: ±0.3 Unit: mm

5. Parameters

1. Product Specifications:

Electrical	Input power	DC 5V-12V
parameters	Maximum power consumption	18W
Ctavava Craas	Random access memory	2GB
Storage Space	Internal storage	16GB



Storage	Temperature	-40℃ ~80℃			
environment	Humidity	0%RH ~ 80%RH (No condensation)			
Working	Temperature	-40℃ ~ 70℃			
environment	Humidity	0%RH ~ 80%RH (No condensation)			
	list:	0.,			
	1×A5L				
	1 x HDMI cable	. 4			
Packaging information	1 x power adapter				
mormation	1×WiFi Glue Stick Antenna				
	1× Certificate of qualification				
	Note: 4G/5G antennas are optional w	ith 4G/5G modules 1/4			
	40				
Size	287mm×140.3mm×42.3mm				
Net weight	≈1140g				
	IP20				
Protection degree	Please pay attention to water resistance, e.g. prevent water dripping into the product, do				
r rotection degree	r lease pay attention to water resistance, e.g. prevent water unppling into the product, do				
	not get wet or rinse the product				
	Android11.0 operating system software				
System software	Android terminal application software				
	FPGA software				



2. Pictures decoding specifications:

Category	Decoding	Size	Format	Remarks
JPEG	JFIF file fommat 1.02	96x32piels to 817×8176 pixels	JPG, JPEG	Non-interlaced scanning is not supported; SRGB JPEG is supported; Adobe RGB JPEG is supported
ВМР	ВМР	Unlimited	ВМР	NA VO
GIF	GIF	Unlimited	GIF	NA
PNG	PNG	Unlimited	PNG	NA O
WEBP	WEBP	Unlimited	WEBP	NA

3. Videos decoding specifications:


Category	Decoding	Resolution	Maximum frame rate	Maximum bit rate	Format	Remarks
MPEG-1/2	MPEG-1/2	48×48 pixels to 1920×1088 pixels	30fps	80Mbps	DAT, MPG, VOB, TS	Support Field Coding
MPEG-4	MPEG-4	48×48 pixels to 1920×1088 pixels	30fps	38.4Mbps	AVI, MKV, MP4, MOV, 3GP	MS, MPEG4 v1/v2/v3, and GMC are not supported
H.264/AVC	H.264	48×48 pixels to 4096×2304 pixels	2304P@60 fps	80Mbps	AVI, MKV, MP4, MOV, 3GP, TS, FLV	Field Coding, MBAFF are supported
MVC	H.264 MVC	48×48 pixels to 4096×2304 pixels	2304P@60 fps	100Mbps	MKV , TS	Only Stereo High Profile is supported
H.265/HEVC	H.265/HE VC	64×64 pixels to 4096×2304 pixels	2304P@60 fps	100Mbps	MKV , MP4, MOV , TS	Main Profile, Tile & Slice are supported
GOOGLE VP8	VP8	48×48 pixels to 1920×1088 pixels	30fps	38.4Mbps	WEBM , MKV	NA
GOOGLE VP9	VP9	64×64 pixels to 4096×2304 pixels	60fps	80Mbps	WEBM , MKV	NA
H.263	H.263	SQCIF(128×96) QCIF(176×144) CIF(352×288) 4CIF(704×576)	30fps	38.4Mbps	3GP, MOV, MP4	H.263+ is not supported




VC-1	VC-1	48×48 pixels to 1920×1088 pixels	30fps	45Mbps	WMV, ASF, TS, MKV, AVI	NA
MOTION JPEG	MJPEG	48×48 pixels to 1920×1088 pixels	60fps	60Mbps	AVI	NA

6. Application Scenarios

1. Single-node control, support Wi-Fi, network port direct connection, USB interface for communication.

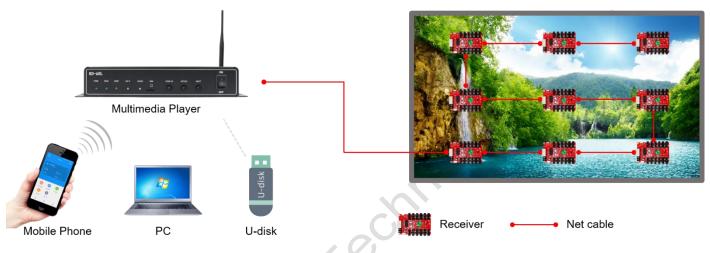


2. Cluster control, support Internet remote control.

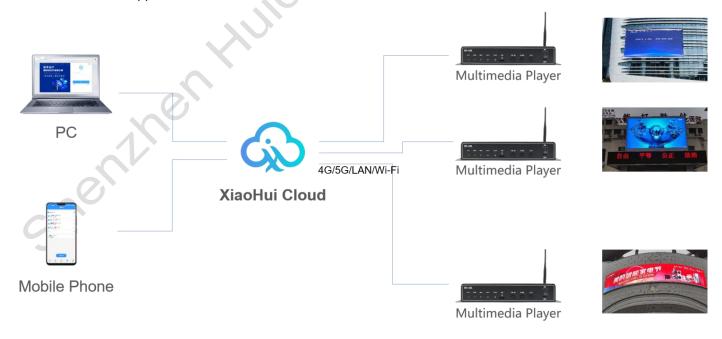



3. Synchronous control, through HDMI signal input, synchronous playback.

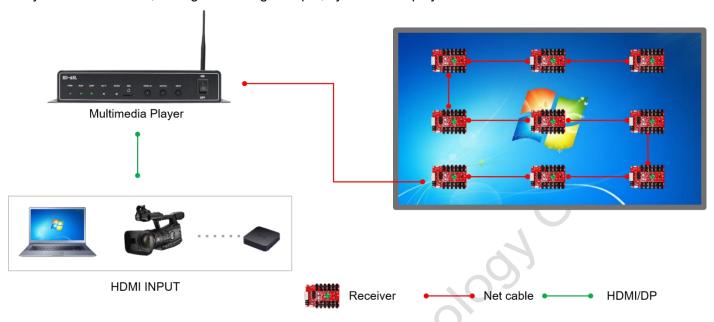

VI. Product Appearance







Illustration:

Welcome to choose Huidu Technology products. There may be differences between the product pictures in the specification and the actual appearance (such as interface caps, antenna installation, etc.), please refer to the actual product. If you have any questions, please contact technical support or salesperson for confirmation.